



Belt Conveyor Machinery Pulleys Technical Specifications



Conveyor Pulley Technical Specification INDUSTRIAL MACHINERY HIC Manufactured


Universal Conveyor Pulleys ensures continuous operation with increased bearing life and reduced power consumption, in a way, the shell is made from heavy tubes or fabricated from steel plates, pulley shafts of carbon steel machined with proper bore and keyway (taper lock bushings are also offered being optional), shafts fitted with anti-friction self-aligning ball bearings, pulley drum furnished with high quality rubber lagging grooved properly to resist slippage and conforms to IS:8531.



Conveyor Pulley

Conveyor Pulley MATERIAL HANDLING EQUIPMENT Product Specification

- Conveyor Belt Drive Pulley upto 2400 mm BW
- Belt Conveyor System Snub Pulleys
- Conveyor Machine Take up Pulley
- Industrial Pulleys, Others, as per specific requirements.

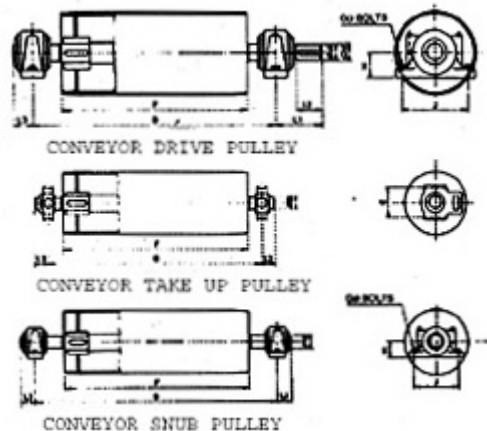

Contact For Quote:

HIC INTERNATIONAL CO -Cast Iron Products Belt Pulley Div.

D-136, Shankar Road, New Delhi - 110060, India

Phone: 91-11-6547 2400, 2874 5120

Fax: 91-11-2874 2791

E-mail : universal@hic-india.com; belts@universaldelhi.org

Website : <http://www.rubber-steel-industrial-products.com>

Key personnel : Mr. Anil Gupta, President



Belt Conveyor Machinery Pulleys Technical Specifications



BELT WIDTH		400	450	500	600	650	750	800	900	1000	1200	1400	1600	1800	2000	
F		500	550	600	700	750	850	950	1050	1150	1400	1600	1800	2000	2200	
B	40 \varnothing	50 \varnothing	700	750	800	900	950	1050	1150	1250	1350	-	-	-	-	
	65 \varnothing		750	800	850	950	1000	1100	1200	1300	1400	1650	1850	-	-	
	80 \varnothing	100 \varnothing	800	850	900	1000	1050	1150	1250	1350	1450	1700	1900	2100	2300	2500
	125 \varnothing	140 \varnothing	850	900	950	1050	1100	1200	1300	1400	1500	1750	1950	2150	2350	2550

d \varnothing	d2 \varnothing	L1	L2	L3	J	H	G	E
40 \varnothing	38 \varnothing	125	58	50	170	60	M12	102
50 \varnothing	48 \varnothing	150	82	55	210	70	M16	102
65 \varnothing	60 \varnothing	175	105	65	230	80	M16	151
80 \varnothing	75 \varnothing	200	105	80	290	100	M20	165
100 \varnothing	95 \varnothing	235	130	95	350	125	M24	260
125 \varnothing	120 \varnothing	275	150	110	420	150	M30	-
140 \varnothing	130 \varnothing	300	175	125	470	170	M30	-

Conveyor Pulleys Information To Be Supplied With Enquiry or Order

1. Pulley Drum Size i.e. 850mm or 1050mm & so on.
2. Drive Shaft or bearing size.
3. Overall shaft length.
4. Plain shaft extension.
5. Face length.
6. Drive shaft extension.
7. Keyway length, depth & width.
8. Finished drum dia.
9. Rubber lagging thickness in mm
10. Finished diameter over rubber lagging.
11. Quantity in Nos.

Disclaimer: Information's, written and verbal are provided by HIC, relative to its products which it determines to be reliable & no liabilities of whatsoever nature in regards to its uses. The purchaser of UNIVERSAL brand industrial products should determine for itself the suitability of such products.



Contact For Quote:

HIC INTERNATIONAL CO -Cast Iron Products Belt Pulley Div.

D-136, Shankar Road, New Delhi - 110060, India

Phone: 91-11-6547 2400, 2874 5120

Fax: 91-11-2874 2791

E-mail : universal@hic-india.com; belts@universaldelhi.org

Website : <http://www.rubber-steel-industrial-products.com>

Key personnel : Mr. Anil Gupta, President